


TEL1-40kTTL

Telemetry transmission of TTL pulses in the range from 40Hz to 40kHz
Range 300-500m

Transmitter



Front side view

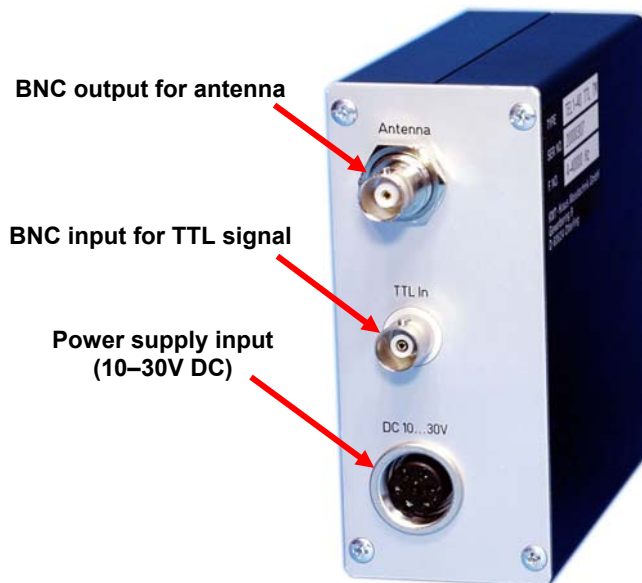

Rear side view




0dB

Antenna

Receiver



Front side view

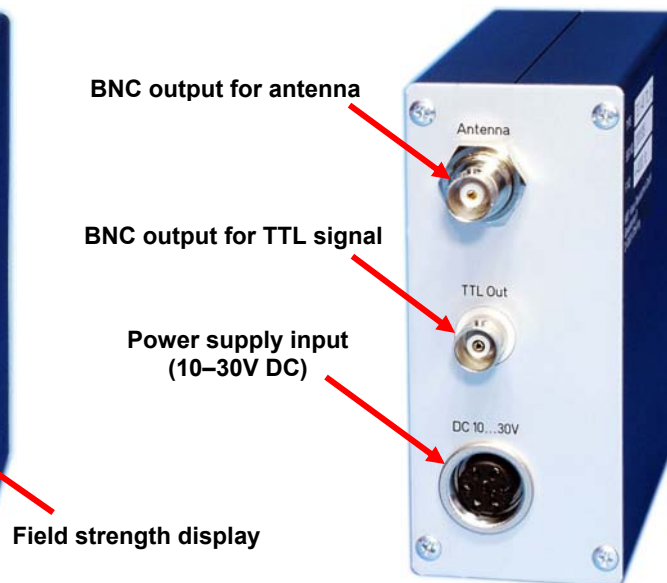

Rear side view



+4dB
Antenna

Specifications

<p>Transmitter</p> <p>Power supply voltage: 10 - 30V DC Power consumption: 0.5W Input signal level: TTL Tolerated duty cycle: 20-80% (will only transmitted up to 1kHz – then moved to 50% on receiver side)</p> <p>Connector type: BNC Weight: 435g Dimensions: 105 x 105 x 45 (without connectors)</p>	<p>Receiver</p> <p>Power supply voltage: 10 - 30V DC Power consumption: 1.35W Output signal level: TTL (0V, 5V) Output impedance: 2kΩ Connector type: BNC Weight: 490g Dimensions: 105 x 105 x 45 (without connectors)</p>																										
<p>Transmitter antenna</p> <p>Cable: RG 058-PE (length 4m) Gain: 0dB (rel. to λ/4 antenna) Frequency range: 410-470MHz Mounting: Magnetic socket (∅73mm, adhesive force 100N, min. area 0.5m²) Length: 180mm Max. power: 50W Connector type: BNC Weight: 300g (without cable)</p>	<p>Receiver antenna</p> <p>Cable: RG 058-PE (length 4m) Gain: +4dB (rel. to λ/2 antenna) Frequency range: 410-470MHz Mounting: Magnetic socket (∅73mm, adhesive force 100N, min. area 0.5m²) Length: 400mm Max. power: 50W Connector type: BNC Weight: 600g (without cable)</p>																										
<p>Transmission</p> <p>Transmission range: up to 500m (line-of-sight connection) Transmission power: 10mW (with European license) Transmission delay: 35μs (constant) Carrier frequencies: 433.3, 433.7, 434.1 or 434.5 (simultaneous operation of up to 4 systems possible)</p> <p>Accuracy for interference-free connection:</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr> <th rowspan="2">Frequency [Hz]</th> <th colspan="2">Max. rel. frequency error for one period [%]</th> </tr> <tr> <th>Duty cycle 50%</th> <th>Duty cycle 20%</th> </tr> </thead> <tbody> <tr><td>40</td><td>0.005</td><td>0.175</td></tr> <tr><td>100</td><td>0.075</td><td>0.175</td></tr> <tr><td>1000</td><td>0.10</td><td>0.175</td></tr> <tr><td>10000</td><td>0.25</td><td>0.50</td></tr> <tr><td>20000</td><td>0.50</td><td>0.85</td></tr> <tr><td>30000</td><td>1.25</td><td>1.75</td></tr> <tr><td>40000</td><td>1.75</td><td>3.75</td></tr> </tbody> </table>	Frequency [Hz]	Max. rel. frequency error for one period [%]		Duty cycle 50%	Duty cycle 20%	40	0.005	0.175	100	0.075	0.175	1000	0.10	0.175	10000	0.25	0.50	20000	0.50	0.85	30000	1.25	1.75	40000	1.75	3.75	<p>Environmental</p> <p>Operating temperature: 0 - 70°C Storage temperature: -20 - 70°C Humidity: 20 - 80% (non-condensing) Vibration: 5g (Mil Standard 810C, Curve C) Shock: 100g (in any direction)</p>
Frequency [Hz]		Max. rel. frequency error for one period [%]																									
	Duty cycle 50%	Duty cycle 20%																									
40	0.005	0.175																									
100	0.075	0.175																									
1000	0.10	0.175																									
10000	0.25	0.50																									
20000	0.50	0.85																									
30000	1.25	1.75																									
40000	1.75	3.75																									
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr> <th rowspan="2">Frequency [Hz]</th> <th colspan="2">Max. rel. frequency error for one period [%]</th> </tr> <tr> <th>Duty cycle 50%</th> <th>Duty cycle 20%</th> </tr> </thead> <tbody> <tr><td>40</td><td>0.005</td><td>0.175</td></tr> <tr><td>100</td><td>0.075</td><td>0.175</td></tr> <tr><td>1000</td><td>0.10</td><td>0.175</td></tr> <tr><td>10000</td><td>0.25</td><td>0.50</td></tr> <tr><td>20000</td><td>0.50</td><td>0.85</td></tr> <tr><td>30000</td><td>1.25</td><td>1.75</td></tr> <tr><td>40000</td><td>1.75</td><td>3.75</td></tr> </tbody> </table>	Frequency [Hz]	Max. rel. frequency error for one period [%]		Duty cycle 50%	Duty cycle 20%	40	0.005	0.175	100	0.075	0.175	1000	0.10	0.175	10000	0.25	0.50	20000	0.50	0.85	30000	1.25	1.75	40000	1.75	3.75	<p>DC power cable</p> <p>Pin assignment:</p>
Frequency [Hz]		Max. rel. frequency error for one period [%]																									
	Duty cycle 50%	Duty cycle 20%																									
40	0.005	0.175																									
100	0.075	0.175																									
1000	0.10	0.175																									
10000	0.25	0.50																									
20000	0.50	0.85																									
30000	1.25	1.75																									
40000	1.75	3.75																									

Specifications are subject to change without notice!

Note

Avoid any contact of the magnetic socket of the antennas with the transmitter or receiver, because the ferrite cores of the internal band filters will premagnetized and change their center frequency. For transportation put every time an iron plate on the magnetic socket area to absorb the magnetic field strength.